


两端双轴承型

产品特点：轮两侧各有一个轴承。

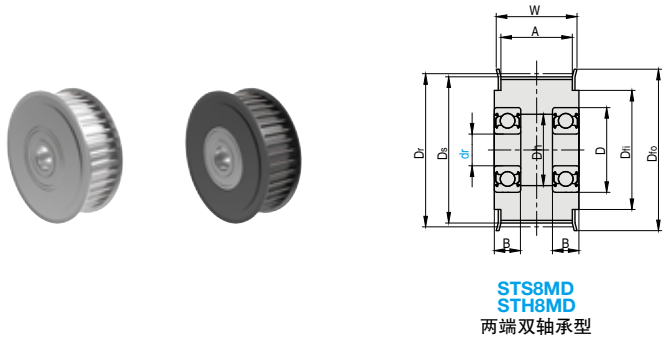

订购编号示例															1 代号 - 2 齿数 - 3 匹配同步带类型 - 4 dr - 5 材料代码																																			
STS8MD															-	30	-	S8M-15															-	15	-	Q														
STH8MD															-	30	-	H8M-15															-	15	-	Q														
1 代号		2 齿数		3 匹配同步带类型		主要尺寸										轴承尺寸			材料规格有无																															
						4 dr	Dr	Ds	Dfo	Dfi	A	W	Dh	轴承型号	D	B	Q	R	S																															
STS8MD STH8MD	22	S8M-25		12	56.02	54.65	64	45		28	33	27	6201-2Z×2	32	10																																			
		S8M-30								33	38																																							
		S8M-40								44	49																																							
	24	S8M-25		12	61.12	59.74	70	50		28	33	27	6201-2Z×2	32	10																																			
		S8M-30								33	38																																							
		S8M-40								44	49																																							
	25	S8M-25		12	63.66	62.29	72	52		28	33	27	6201-2Z×2	32	10																																			
		S8M-30								33	38																																							
		S8M-40								44	49																																							
	26	S8M-15		12	66.21	64.84	75	54		17	22	25	6001-2Z×2	28	8																																			
		S8M-25								28	33																																							
		S8M-30								33	38	27	6201-2Z×2	32	10																																			
		S8M-40								44	49																																							
	28	S8M-25		15	71.3	69.93	80	59		28	33	30	6202-2Z×2	35	11																																			
		S8M-30								33	38																																							
		S8M-40								44	49																																							
	30	S8M-15		15	76.39	75.02	85	64		17	22	29	6002-2Z×2	32	9																																			
		S8M-25								28	33																																							
		S8M-30								33	38	30	6202-2Z×2	35	11																																			
		S8M-40		44						49																																								
		S8M-25		20											28	33	37	6004-2Z×2	42	12																														
		S8M-30													33	38																																		
	S8M-40		44		49	41	6204-2Z×2	47	14																																									
	32	S8M-25		20	81.49										80.12	90	69		28	33	41	6204-2Z×2	47	14																										
		S8M-30				33	38																																											
		S8M-40				44	49																																											
	34	S8M-25		20	86.58	85.21	95	74		28	33	41	6204-2Z×2	47	14																																			
		S8M-30								33	38																																							
		S8M-40								44	49																																							
	40	S8M-25		25	101.86	100.49	110	89		28	33	43	6005-2Z×2	47	12																																			
		S8M-30								33	38																																							
S8M-40		44	49																																															

▲ 轴承精度等级：0 级（压入前）
▲ 轴承采用压入方式
▲ STH8MD 型号匹配同步带类型为 H8M 系列。

代号	类型	5 材料代码	材质			表面处理
			主体	挡片	轴承	
STS8MD STH8MD	两端双轴承型	Q	铝合金	铝合金		本色阳极氧化处理
		R	45#	SPCC	钢	四氧化三铁保护膜
		S	45#	SPCC		无电解镀锌

同步带轮